



2025-2026



**ALWAYS
DO THE BEST**

WD040210210

Brushless Impact Drill

60N.m

Voltage: 21V D.C.
No load speed: 0-500/0-1850/min
Impact rate: 0-8400/0-31000/min
Chuck capacity: Ø1.5-13mm
Max.torque: 60N.m
Torque gear: 20 positions
Functional gears: 3 positions
Working capacity: Ø13mm steel,
Ø16mm concrete,
Ø40mm wood




WD040410210

Brushless Impact Driver

230N.m

Voltage: 21V D.C.
No load speed:
0-1100/2200/3000/3800/min
Impact rate:
0-1400/2800/3600/4400/min
Chuck capacity: 1/4"
Max.torque: 230N.m



WD910410210

Brushless Impact Drill Brushless Impact Driver

2 in 1

Voltage: 21V D.C.
Max.torque: 60N.m
Impact rate: 0-8400/0-31000/min
Chuck capacity: Ø1.5-13mm
Working capacity: Ø13mm steel,
Ø16mm concrete, Ø40mm wood
Max.torque: 230N.m
Impact rate: 0-1400/2800/3600/4400/min
Chuck capacity: 1/4"



WD040430210

Brushless Impact Wrench

550N.m

Voltage: 21V D.C.
No load speed:
0-1800/2300/2800/min
Impact rate:
0-1800/2200/3000/min
Chuck size: 1/2" Anvil
Torque: 280/400/550N.m



WD040490210

Brushless Impact Wrench

850N.m

Voltage: 21V D.C.
No load speed:
0-1400/1900/2400/min
Impact rate:
0-1500/1800/2200/min
Chuck size: 1/2" Anvil
Torque: 300/500/850N.m



WD041310210

Brushless Rotary Hammer

2J

Voltage: 21V D.C.
No load speed:
0-1650/min
Impact rate: 0-5500/min
Max.impact power: 2J
Max.drilling capacity:
Ø13mm metal,
Ø22mm concrete,
Ø32mm wood




WD040540210

Brushless Angle Grinder

115mm

Voltage: 21V D.C.
No load speed: 7500/min
Disc size: 115mm
Spindle thread: M14




WD040550210

Brushless Angle Grinder

125mm

Voltage: 21V D.C.
No load speed: 7500/min
Disc size: 125mm
Spindle thread: M14




WD041210210

Brushless Circular Saw

150mm

Voltage: 21V D.C.
No load speed: 0-6500/min
Blade size: 150mm



WD119520055

Battery Charger

21V

Input voltage: 100-240V~50/60Hz
Input power: 55W
Output voltage: 21V D.C.
Output current: 2A




WD119140210

Battery

21V

21V
2000mAh Battery pack



WD119150210

Battery

21V

21V
4000mAh Battery pack



WD010130450 Electric Drill

450W

Voltage: 220-240V~50/60Hz
Input power: 450W
No load speed:
0-3300/min
Max drilling capacity:
Ø10mm steel,
Ø25mm wood



WD010220650 Impact Drill

650W

Voltage: 220-240V~50/60Hz
Input power: 650W
No load speed:
0-3000/min
Impact rate: 0-48000/min
Max drilling capacity:
Ø10mm steel,
Ø13mm concrete,
Ø25mm wood



WD010240850 Impact Drill

850W

Voltage: 220-240V~50/60Hz
Input power: 850W
No load speed:
0-3000/min
Impact rate: 0-48000/min
Max drilling capacity:
Ø13mm steel,
Ø13mm concrete,
Ø32mm wood



WD010221050 Impact Drill

1050W

Voltage: 220-240V~50/60Hz
Input power: 1050W
No load speed:
0-2800/min
Impact rate: 0-51200/min
Max drilling capacity:
Ø13mm steel,
Ø16mm concrete,
Ø40mm wood



WD011320026 Rotary Hammer

26mm/800W

Voltage: 220-240V~50/60Hz
Input power: 800W
No load speed:
0-1200/min
Hammer rate:
0-5500/min
Max drilling capacity:
Ø13mm steel,
Ø26mm concrete,
Ø40mm wood



WD011340026 Rotary Hammer

26mm/950W

Voltage: 220-240V~50/60Hz
Input power: 950W
No load speed:
0-1200/min
Hammer rate: 0-5500/min
Max drilling capacity:
Ø13mm steel,
Ø26mm concrete,
Ø40mm wood



WD011320028 Rotary Hammer

28mm/1050W

Voltage: 220-240V~50/60Hz
Input power: 1050W
No load speed:
0-780/min
Hammer rate: 0-4300/min
Max drilling capacity:
Ø13mm steel,
Ø28mm concrete,
Ø40mm wood



WD011320032 Rotary Hammer

32mm/1250W

Voltage: 220-240V~50/60Hz
Input power: 1250W
No load speed:
0-800/min
Hammer rate: 0-4500/min
Max drilling capacity:
Ø13mm steel,
Ø32mm concrete,
Ø40mm wood



WD011330036 Rotary Hammer

36mm/1500W

Voltage: 220-240V~50/60Hz
Input power: 1500W
No load speed:
0-820/min
Hammer rate: 0-4700/min
Max drilling capacity:
Ø13mm steel,
Ø36mm concrete,
Ø45mm wood



WD011410175 Demolition Breaker

1200W


Voltage: 220-240V~50/60Hz
Input power: 1200W
Impact rate: 3750/min
Impact force: 17.5J



WD011420600 Demolition Breaker

1500W

Voltage: 220-240V~50/60Hz
Input power: 1500W
Impact rate: 1860/min
Impact force: 60J
Chuck type: SDS Hex



WD011440600 Demolition Breaker

1900W

Voltage: 220-240V~50/60Hz
Input power: 1900W
Impact rate: 2100/min
Impact force: 80J
Chuck type: SDS Hex



WD010590750 Angle Grinder

115mm/750W

Voltage: 220-240V~50/60Hz
Input power: 750W
No load speed: 11000/min

Disc diameter:
115mm
Spindle thread:
M14



WD010580750 Angle Grinder

115mm/750W

Voltage: 220-240V~50/60Hz
Input power: 750W
No load speed: 11000/min

Disc diameter:
115mm
Spindle thread:
M14



WD010520850 Angle Grinder

115mm/850W

Voltage: 220-240V~50/60Hz
Input power: 850W
No load speed: 2800-11000/min

Disc diameter:
115mm
Spindle thread:
M14



WD010550950 Angle Grinder

125mm/950W

Voltage: 220-240V~50/60Hz
Input power: 950W
No load speed: 10000/min

Disc diameter:
125mm
Spindle thread:
M14



WD010570950 Angle Grinder

125mm/950W

Voltage: 220-240V~50/60Hz
Input power: 950W
No load speed: 2800-10000/min

Disc diameter:
125mm
Spindle thread:
M14



WD010511200 Angle Grinder

125mm/1200W

Voltage: 220-240V~50/60Hz
Input power: 1200W
No load speed: 10000/min

Disc diameter:
125mm
Spindle thread:
M14



WD010521200 Angle Grinder

125mm/1200W

Voltage: 220-240V~50/60Hz
Input power: 1200W
No load speed: 2800-10000/min

Disc diameter:
125mm
Spindle thread:
M14



WD010542000 Angle Grinder

180mm/2000W

Voltage: 220-240V~50/60Hz
Input power: 2000W
No load speed: 8500/min

Disc diameter:
180mm
Spindle thread:
M14



WD010512600 Angle Grinder

230mm/2600W

Voltage: 220-240V~50/60Hz
Input power: 2600W
No load speed: 6600/min

Disc diameter:
230mm
Spindle thread:
M14



WD010631400 Angle Polisher

1400W

Voltage: 220-240V~50/60Hz
Input power: 1400W
No load speed:
1300-3500/min
Disc diameter:
180mm




WD010710185 Rotary Tool

185W

Voltage: 220-240V~50/60Hz
Input power: 185W
No load speed:
8000-33000/min
Collect chuck diameter:
1.6mm, 2.4mm,
3.2 mm



290 PCS



WD010710650 Die Grinder

650W

Voltage: 220-240V~50/60Hz
Input power: 650W
No load speed: 5500-30000/min
Collect chuck diameter: 6mm
Max.wheel
diameter:25mm



WD010710550

Die Grinder

550W

Voltage: 220-240V~50/60Hz
Input power: 550W
No load speed: 30000/min
Collect chuck diameter:
6mm
Max.wheel diameter:
25mm



WD010720550

Die Grinder

550W

Voltage: 220-240V~50/60Hz
Input power: 550W
No load speed: 10000-30000/min
Collect chuck diameter: 6mm
Max.wheel diameter:
25mm



WD011710710

Reciprocating Saw

710W

Voltage: 220-240V~50/60Hz
Rated Power: 710W
Max. cutting depth in wood: 115mm
No load speed: 0-3000/min
Stroke Length: 20mm



cutting meat



WD010810240

Orbital Sander

240W

Voltage: 220-240V,50/60Hz
Input power: 240W
No load speed:
15000/min
Sanding pad size:
103x110mm



WD011010400

Random Orbit Sander

400W

Voltage: 220-240V,50/60Hz
Input power: 400W
No load speed:
5000-14000/min
Sanding pad diameter:
125mm



WD010820320

Finishing Sander

320W

Voltage: 220-240V~50/60Hz
Input power:
320W
No load speed:
14000/min
Sanding pad size:
90x180mm



WD011820822

Electric Planer

620W

Voltage: 220-240V~50/60Hz
Input Power: 620W
No load speed: 17000/min
Planing width & depth:
82x2mm



WD011810824

Electric Planer

1050W

Voltage: 220-240V~50/60Hz
Input Power: 1050W
No load speed: 15000/min
Planing width & depth:
82x4mm



WD012111500

Marble Cutter

1500W

Voltage: 220-240V~50/60Hz
Input power: 1500W
No load speed: 14000/min
Dia of blade: 110/115mm
Max cutting capacity:
110x20mm blade:
90°: 35mm
45°: 24mm
115x22.23mm blade:
90°: 36mm
45°: 22mm



WD011230185

Circular Saw

185mm/1500W

Voltage: 220-240V~50/60Hz
Input Power: 1500W
No load speed:
4800/min
Cutting capacity:
90°: 65mm
45°: 44mm
Saw blade:
185x20mm 24T



WD011210235

Circular Saw

235mm/2800W

Voltage: 220-240V~50/60Hz
Input Power: 2800W
No load speed:
4600/min
Cutting capacity:
90°: 82mm
45°: 62mm
Saw blade:
235x25.4mm 60T



WD011630650

Jig Saw

650W

Voltage: 220-240V~50/60Hz
Input power: 650W
No load speed: 500-2600/min
Cutting capacity:
Ø10mm in steel,
Ø80mm in wood



WD012510850

Drywall Sander

850W

6 PCS

Voltage: 220-240V~50/60Hz
Input power: 850W
No load speed: 900-2100/min
Sanding pad diameter: 215mm
Sand paper diameter: 225mm





WD011520350

Electric Spray Gun

350W

Voltage: 220-240V~50/60Hz
Input power: 350W
Delivery volume : 0-700ml/min
Maximum viscosity: 60DIN-S
Container volume: 800ml





WD011510500

Electric Spray Gun

500W

Voltage: 220-240V~50/60Hz
Rated power: 500W
Delivery volume: 0-600ml/min
Maximum viscosity: 50DIN-S
Container volume: 800ml
Air Hose Length : 1.8m



WD012411400

Mixer

1400W

Voltage: 220-240V~50/60Hz
Input power: 1400W
No load speed: 0-480/800/min
Tool holder: M14
Max.mixing paddle dia: 140mm




WD012010520

Laminate Trimmer

520W

Voltage: 220-240V~50/60Hz
Input power : 520W
No load speed: 30000/min
Collect chuck capacity: 6mm & 1/4"



WD011921850

Router

1850W

Voltage: 220-240V~50/60Hz
Input power: 1850W
No load speed: 23000/min
Collect chuck capacity: 6mm, 8mm, 12mm
Max.plunge depth: 55mm



WD050420800

Plastic Tube Welding Tool

800W

Rated voltage: 220-240V~50/60Hz
Power input: 800W
Temperature: 300°C
Welding Size: Ø20-32mm



WD050430800

Plastic Tube Welding Tool

800W

Rated voltage: 220-240V~50/60Hz
Power input: 800W
Temperature: 0-300°C

Welding Size: Ø20-63mm



WD050412000

Plastic Tube Welding Tool

2000W

Rated voltage: 220-240V~50/60Hz
Power input: 1000/2000W
Temperature: 0-300°C
Welding Size: Ø20-63mm



WD050132000

Heat Gun

2000W

Voltage: 220-240V~50/60Hz
Input power: 2000W
Temperature: 50°C/480°C/600°C
Air flow: 250L/200L/550L/min



WD050142000

Heat Gun

2000W

Voltage: 220-240V~50/60Hz
Input power: 2000W
Temperature: 50°C/50°C-480°C/90°C-600°C
Air flow: 250L/200L/550L/min



WD050210450

Aspirator Blower

450W

Rated voltage: 220-240V~50/60Hz
Power input: 450W
No load speed: 14000/min


Max blowing rate: 3.0m³/min



WD050210680 Aspirator Blower

680W

Rated voltage: 220-240V~50/60Hz
Power input: 680W
No load speed: 6000-16000/min

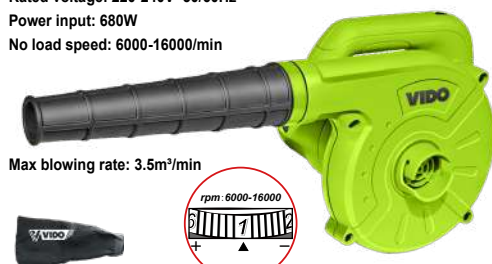


Max blowing rate: 3.5m³/min



WD030520013 Drill Press

350W


Voltage: 220-240V~50Hz
Input power: 350W
No load speed: 580-2650/min
Spindle speed settings: 5
Max drilling capacity: 13mm
Chuck capacity: 1.5-13mm
Spindle travel: 50mm
Column diameter: 46mm
Spindle taper: MT2#
Table size: 160x160mm



WD030913600 Diamond Core Drill

3600W


Voltage: 220-240V~50/60Hz
Input power: 3600W
No load speed: 800/min
Output shaft size: 1-1/4"
Port size: 1/4"
Drilling diameter of reinforced concrete: 20-200mm
Drilling diameter of brick wall: 20-240mm
Column square tube size: 40x40mm
Rack length: 600mm



WD030220254 Mitre Saw

1800W

Voltage: 220-240V~50/60Hz
Input power: 1800W
No load speed: 5300/min
Blade size: 254x25.4x3mm 60T
Max. cutting capacity: 70x140mm

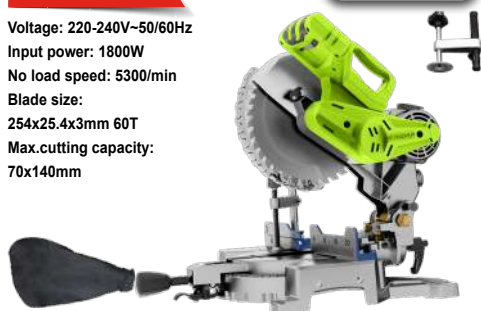

WD030230254 Sliding Mitre Saw

2000W


Voltage: 220-240V~50/60Hz
Input power: 2000W
No load speed: 5000/min
Blade size: 254x25.4x3mm 48T
Max. cutting capacity: 70x305mm



WD030210305 Sliding Mitre Saw

2200W

Voltage: 220-240V~50/60Hz
Input power: 2200W
No load speed: 5300/min
Blade size: 305x30x3mm 60T
Max. cutting capacity: 95x310mm

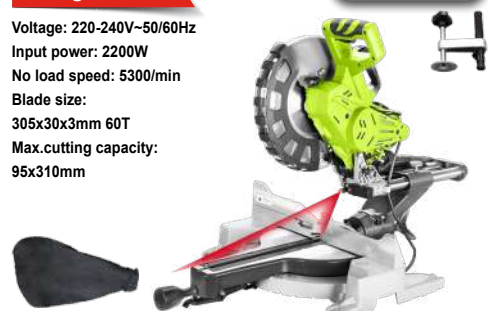

WD030312000 Cut Off Saw

2000W


Voltage: 220-240V~50/60Hz
Input power: 2000W
No load speed: 4000/min
Blade size: 355x25.4x3mm
Max. cutting capacity: 100mm



WD030312500 Cut Off Saw

2500W

Voltage: 220-240V~50/60Hz
Input power: 2500W
No load speed: 4100/min
Blade size: 355x25.4x3mm
Max. cutting capacity: 110mm

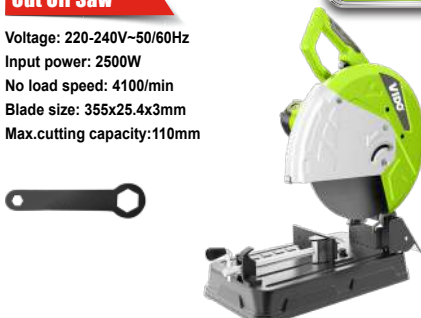

WD030610254 Table Saw

1500W

Voltage: 220-240V~50/60Hz
Input power: 1500W
Blade size: 254x25.4x2.8mm 40T
90°: 0-80mm 45°: 0-55mm
Blade Tilting Range: 0°-45°
Left Max. Cutting Width: 510mm
Right Max. Cutting Width: 480mm



WD020240370 Peripheral Pump

0.5HP/370W

Voltage: 220-240V~50Hz
Input power: 370W(0.5HP)
No load speed: 2850/min
Max. head: 35m
Max. suction: 8m
Max. flow: 35L/min
Pipe diameter: 1"x1"



WD020250750 Peripheral Pump

1.0HP/750W


Voltage: 220-240V~50Hz
Input power: 750W(1.0HP)
No load speed: 2850/min
Max. head: 50m
Max. suction: 8m
Max. flow: 60L/min
Pipe diameter: 1"x1"



WD020270750 Jet Pump

1.0HP/750W


Voltage: 220-240V~50Hz
Input power: 750W(1.0HP)
No load speed: 2850/min
Max. head: 50m
Max. suction: 9m
Max. flow: 60L/min
Pipe diameter: 1"x1"



WD020290750 Centrifugal Pump

1.0HP/750W

Voltage: 220-240V~50Hz
Input power: 750W(1.0HP)
No load speed: 2850/min
Max.head: 30m
Max.suction: 8m
Max.flow: 120L/min
Pipe diameter: 1"x1"



WD020241500 Centrifugal Pump

2.0HP/1500W

Voltage: 220-240V~50Hz
Input power: 1500W(2.0HP)
No load speed: 2850/min
Max.head: 42m
Max.suction: 8m
Max.flow: 130L/min
Pipe diameter: 1"x1"



WD020260370 Automatic Self-priming Peripheral Pump

0.5HP/370W


Voltage: 220-240V~50Hz
Input power: 370W(0.5HP)
No load speed: 2850/min
Max.head: 35m
Max.suction: 8m
Max.flow: 35L/min
Pipe diameter: 1"x1"



WD020280750 Automatic Self-Priming Jet Pump

1.0HP/750W

Voltage: 220-240V~50Hz
Input power: 750W(1.0HP)
No load speed: 2850/min
Max.head: 50m
Max.suction: 8m
Max.flow: 60L/min
Pressure switch: 2.2-2.3kgf/cm2
Pipe diameter: 1"x1"



WD730131100 Automatic Pump Control

1"x1"/1100W

Voltage: 110V-240V~50/60Hz
Max.power input: 1100W
Max.current: 10A
Starting pressure setting: 1.5-3.5bar
Max working pressure: 10bar
Max operating temperature: 60°C
Connection thread: 1"x1"



WD730111100 Automatic Pump Control

1"x1"/1100W


Rated Voltage: 110V-240V~50/60Hz
Max.power input: 1100W
Max.current: 10A
Starting pressure setting: 1.5bar
Max working pressure: 10bar
Max operating temperature: 60°C
Connection thread: 1"x1"



WD020417500 High Pressure Washer Pump

7500W

Voltage: 380V~50Hz
Input power: 7500W
Allowable pressure: 248bar
Rated pressure: 200bar
Max.flow: 16L/min
Rated flow: 11L/min
Max.inlet pressure: 1.2Mpa
Supply temperature max: 50°C



WD020421400 High Pressure Washer

1400W

Voltage: 220-240V~50/60Hz
Input power: 1400W
Allowable pressure: 125bar
Rated pressure: 80bar
Max.flow: 6.5L/min
Rated flow: 5.5L/min
Max.inlet pressure: 1.2MPa
Supply temperature max: 50°C



WD020412000 High Pressure Washer

2000W


Voltage: 220-240V~50/60Hz
Input power: 2000W
Allowable pressure: 150bar
Rated pressure: 100bar
Max. flow: 7.0L/min
Rated flow: 6.0L/min
Max.inlet pressure: 1.2MPa
Supply temperature max: 50°C



WD020427500 High Pressure Washer Three-phase

7500W


Voltage: 380V~50Hz
Input power: 7500W
Allowable pressure: 248bar
Rated pressure: 200bar
Max.flow: 16L/min
Rated flow: 11L/min
Max.inlet pressure: 1.2Mpa
Supply temperature max: 50°C



WD020520400 Sewage Submersible Pump

0.5HP/400W

Voltage: 220-240V~50Hz
Input power: 400W(0.5HP)
No load speed: 2850/min
Max.head: 7m
Max.submersion depth: 5m
Min.water lever: 0.7m
Max.flow: 175L/min
Pipe diameter: 1"x1"



WD020540750 Sewage Submersible Pump

1.0HP/750W

Voltage: 220-240V~50Hz
Input power: 750W(1.0HP)
No load speed: 2850/min
Max.head: 9m
Max.submersion depth: 5m
Min.water lever: 0.7m
Max.flow: 233L/min
Pipe diameter: 1"x1"



WD020510370 Sumersible Pump


Voltage: 220-240V~50Hz
Input power: 370W(0.5HP)
No load speed: 2850/min
Max.head: 15m
Max.submersion depth: 15m
Min.water lever: 0.5m
Max.flow: 100L/min
Pipe diameter: 1"x1"



1"/370W

WD020550750 Sumersible Pump


Voltage: 220-240V~50Hz
Input power: 750W(1.0HP)
No load speed: 2850/min
Max.head: 32m
Max.submersion depth: 5m
Min.water lever: 0.5m
Max.flow: 125L/min
Pipe diameter: 1"x1"



1"/750W

WD020511100 Sumersible Pump

Voltage: 220-240V~50Hz
Input power: 1100W(1.5HP)
No load speed: 2850/min
Max.head: 18m
Max.submersion depth: 5m
Min.water lever: 0.5m
Max.flow: 468L/min
Pipe diameter: 2"x2"



2"/1100W

WD020570750 Sewage Submersible Pump


Voltage: 220-240V~50Hz
Input power: 750W(1.0HP)
No load speed: 2900/min
Max.head: 15m
Max.submersion depth: 5m
Max.flow: 350L/min
Min.water lever: 0.7m
Pipe diameter: 2"x2"
10m cable length and plug
With blade



2"/750W

WD020521100 Sewage Submersible Pump


Voltage: 220-240V~50Hz
Input power: 1100W(1.5HP)
No load speed: 2900/min
Max.head: 16m
Max.submersion depth: 5m
Max.flow: 365L/min
Min.water lever: 0.7m
Pipe diameter: 2"x2"
10m cable length and plug
With blade



2"/1100W

WD020531500 Sewage Submersible Pump


Voltage: 220-240V~50Hz
Input power: 1500W(2.0HP)
No load speed: 2900/min
Max.head: 18m
Max.submersion depth: 5m
Max.flow: 400L/min
Min.water lever: 0.7m
Pipe diameter: 2"x2"
10m cable length and plug
With blade



2"/1500W

WD020610370 Deep Well Pump

Voltage: 220-240V~50Hz
Input power: 370W(0.5HP)
No load speed: 2850/min
Well body diameter: Ø100mm(4")
Rated flow: 3m³/h
Rated head: 36m
Max.head: 52m



0.5HP/370W

WD020610550 Deep Well Pump

Voltage: 220-240V~50Hz
Input power: 550W(0.75HP)
Well body diameter: Ø100mm(4")
Rated flow: 3m³/h
Rated head: 51m
Max.head: 73m



0.75HP/550W

WD020610750 Deep Well Pump

Voltage: 220-240V~50Hz
Input power: 750W(1.0HP)
Well body diameter: Ø100mm(4")
Rated flow: 3m³/h
Rated head: 69m
Max.head: 100m



1.0HP/750W

WD020611100 Deep Well Pump


Voltage: 220-240V~50Hz
Input power: 1100W(1.5HP)
Well body diameter: Ø100mm(4")
Rated flow: 3m³/h
Rated head: 95m
Max.head: 135m



1.5HP/1100W

WD020611500 Deep Well Pump

Voltage: 220-240V~50Hz
Input power: 1500W(2.0HP)
Well body diameter: Ø100mm(4")
Rated flow: 3m³/h
Rated head: 119m
Max.head: 167m



2.0HP/1500W

WD020612250 Deep Well Pump

Voltage: 220-240V~50Hz
Input power: 2250W(3.0HP)
Well body diameter: Ø100mm(4")
Rated flow: 3m³/h
Rated head: 159m
Max.head: 225m



3.0HP/2250W

WD060212415

Silent Oil Free Air Compressor

24L/1100W

Rated voltage:
220-240V~50Hz
Power input:
1100W(1.5HP)
Rated speed:
2800/min
Tank volume: 24L



WD060215020

Silent Oil Free Air Compressor

50L/1500W

Rated voltage:
220-240V~50Hz
Power input:
1500W(2.0HP)
Rated speed:
2800/min
Tank volume:
50L



WD060211052

Silent Oil Free Air Compressor

100L/3900W

Rated voltage:
220-240V~50Hz
Power input:
3900W(5.2HP)
Rated speed:
2800/min
Tank volume:
100L



WD060211552

Silent Oil Free Air Compressor

150L/3900W

Rated voltage:
220-240V~50Hz
Power input:
3900W(5.2HP)
Rated speed:
2800/min



Tank volume:
150L



WD060212070

Silent Oil Free Air Compressor

200L/5200W

Rated voltage: 220-240V~50Hz
Power input:
1300W*4motors
(7.0HP)
Rated speed:
2800/min
Tank volume:
200L



Max work pressure: 8bar (116psi)



WD210115000

Air Brad Nailer

GA18

Load capacity: 100pcs
Brad size: 15-50mm
Ga18, 1.25x1.00mm
With Europe type connector,
USA type connector,
Nitro type connector
and Italy type connector.
Operation pressure:
4-7bar (58-101.5psi)



WD210115040

2 In 1 Combo Brad Nailer

GA18

Load capacity: 100Pcs
Brad size: 15-50mm
Ga18, 1.25x1.00mm
Staple size: 16-40mm
Staple crown: 5.7mm
With Europe type connector,
USA type connector,
Nitro type connector
and Italy type connector.
Operation pressure:
4-7bar (58-101.5psi)



WD210113506

Air Spray Gun

400 ML

Nozzle size: 1.5mm
Nozzle range: 1.2-2.5mm
Air consumption:
2-6CFM(60-170L/min)
Cup size: 400ml
Fluid delivery:
160-240ml/min
Air pressure: 50psi(3.5bar)
Air inlet: 1/4"



WD210113014

Air Spray Gun

600 ML

Nozzle size: 1.4mm
Nozzle range: 1.2-2.5mm
Air consumption:
5-10CFM(140-280L/min)
Cup size: 600ml
Fluid delivery:
100-220ml/min
Air pressure: 43psi (3bar)
Air inlet: 1/4"



WD210123506

Air Spray Gun

1000 ML

Nozzle size: 1.5mm
Nozzle range:
1.2-2.5mm
Air consumption:
2-6CFM(60-170L/min)
Cup size: 1000ml
Fluid delivery:
160-240ml/min
Air pressure:
50psi (3.5bar)
Air inlet: 1/4"




WD060310800

Gasoline Generator

800W

Rated voltage: 230V~50Hz
Rated A.C.output:
650W
Max. A.C.output:
800W
AC current: 2.8A
Displacement: 63cc
Motor power: 1.8HP
Fuel tank capacity:
3.6L
Fuel mix ratio: 50:1



WD060321000

Gasoline Generator

1000W

Rated voltage: 230V~50Hz
Rated A.C.output: 900W
Max.A.C.output: 1000W
AC current: 4A
Rated D.C.output:
12V/8.3A
Displacement: 98cc
Motor power: 2.9HP
Fuel tank capacity:
4.5L




WD060312200 Gasoline Generator

2200W

HAND LIFTER

Rated voltage: 230V~50Hz
Max.A.C.output: 2200W
AC current: 9A
Rated D.C.output:
12V/8.3A
Displacement:
196cc
Motor power: 6.5HP
Fuel tank capacity:
15L




WD060313000 Gasoline Generator

3000W

HAND LIFTER

Rated voltage: 230V~50Hz
Max.A.C.output:3000W
AC current: 12A
Rated D.C.output:
12V/8.3A
Displacement:
208cc
Motor power: 7.0HP
Fuel tank capacity:
15L




WD060313000 Gasoline Generator

3000W

**HAND LIFTER
ELECTRIC START**

Rated voltage: 230V~50Hz
Max.A.C.output: 3000W
AC current:12A
Rated D.C.output:
12V/8.3A
Displacement:
208cc
Motor power:7.0HP
Fuel tank capacity:
15L



**With
Battery**

WD060313000 Gasoline Generator

3000W

**HAND LIFTER
ELECTRIC START**

Rated voltage: 230V~50Hz
Max.A.C.output:3000W
AC current: 12A
Rated D.C.output:
12V/8.3A
Displacement:
208cc
Motor power: 7.0HP
Fuel tank capacity:
15L




**With
Battery**

WD060313500 Gasoline Generator

3500W

**HAND LIFTER
ONE-CLICK START**

Rated voltage: 230V~50Hz
Max.A.C.output: 3500W
AC current: 14A
Rated D.C.output:
12V/8.3A
Displacement:
223cc
Motor power: 8.5HP
Fuel tank capacity:
15L




**With
Battery**

WD060325500 Gasoline Generator

5500W

**HAND LIFTER
ELECTRIC START**

Rated voltage: 230V~50Hz
Max.A.C.output: 5500W
AC current: 21.7A
Rated D.C.output:
12V/8.3A
Displacement:
389cc
Motor power: 13HP
Fuel tank capacity:
25L




**With
Battery**

WD060615500 Gasoline Generator

5500W

HAND LIFTER

Rated voltage:220/380V~50Hz
Rated /Max. A.C.output
(220/380V GAS):5000/5500W
Rated /Max. A.C.output
(220/380V LPG):4500/4950W
Rated /Max. A.C.output
(220/380V NG):4000/4400W
Displacement:398cc
Fuel tank capacity:25L
Engine oil system capacity:1.1L
Rated D.C.output:12V/8.3A




**GAS:5000/5500W
LPG:4500/4950W
NG:4000/4400W**

WD060616500 Gasoline Generator

6500W

HAND LIFTER

Rated voltage:220/380V~50Hz
Rated /Max. A.C.output
(220/380V GAS):6000/6500W
Rated /Max. A.C.output
(220/380V LPG):5400/5850W
Rated /Max. A.C.output
(220/380V NG):4800/5200W
Displacement:420cc
Fuel tank capacity:25L
Engine oil system capacity:1.1L
Rated D.C.output:12V/8.3A




**GAS:6000/6500W
LPG:5400/5850W
NG:4800/5200W**

WD060617500 Gasoline Generator

7500W

HAND LIFTER

Rated voltage:220/380V~50Hz
Rated A.C.output(220V GAS):6500W
Rated A.C.output(380V GAS):7000W
Max. A.C.output(220/380V GAS):
7500W
Rated /Max. A.C.output
(220/380V LPG):6300/6750W
Rated /Max. A.C.output
(220/380V NG):5600/6000W
Displacement:439cc
Fuel tank capacity:25L
Engine oil system capacity:1.1L
Rated D.C.output:12V/8.3A



**GAS:6500/7500W
LPG:6300/6750W
NG:5600/6000W**

WD060618000 Gasoline Generator

8000W

HAND LIFTER

Rated voltage:220/380V~50Hz
Rated /Max. A.C.output
(220/380V GAS):7500/8000W
Rated /Max. A.C.output
(220/380V LPG):6750/7200W
Rated /Max. A.C.output
(220/380V NG):6000/6400W
Displacement:459cc
Fuel tank capacity:25L
Engine oil system capacity:1.1L
Rated D.C.output:12V/8.3A




**GAS:7500/8000W
LPG:6750/7200W
NG:6000/6400W**

WD060610100 Gasoline Generator

10000W

HAND LIFTER

Rated voltage:220/380V~50Hz
Rated /Max. A.C.output
(220/380V GAS):9000/10000W
Rated /Max. A.C.output
(220/380V LPG):8100/9000W
Rated /Max. A.C.output
(220/380V NG):7200/8000W
Displacement:520cc
Fuel tank capacity:25L
Engine oil system capacity:1.1L
Rated D.C.output:12V/8.3A



**GAS:9000/10000W
LPG:8100/9000W
NG:7200/8000W**

WD060313800 Gasoline Inverter Generator

3800W

HAND LIFTER

Rated voltage: 230V~50Hz
Rated A.C.output:
3500W
Max.A.C.output:
3800W
Displacement:
223cc
Fuel tank
capacity: 11L
Motor power:
8.5HP




WD020811855 Gasoline Chain Saw


18"/54.5cc

Displacement: 54.5cc
Engine power: 2400W/3.2HP
Guide bar size: 460mm(18")
Standard chain: 0.325"/0.058"
Fuel tank capacity: 550ml

Fuel mix ratio
25:1

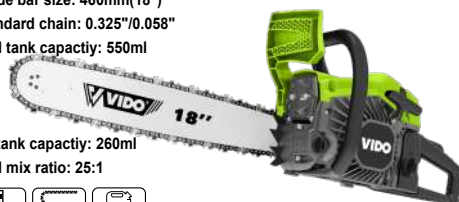

Oil tank capacity: 260ml
Fuel mix ratio: 25:1



WD020812055 Gasoline Chain Saw


20"/54.5cc

Displacement: 54.5cc
Engine power: 2200W/2.9HP
Guide bar size: 500mm(20")
Standard chain: 0.325"/0.058"
Fuel tank capacity: 550ml

Fuel mix ratio
25:1



Oil tank capacity: 260ml
Fuel mix ratio: 25:1



WD020812255 Gasoline Chain Saw


22"/54.5cc

Displacement: 54.5cc
Engine power: 2700W/3.6HP
Guide bar size: 560mm(22")
Standard chain: 0.325"/0.058"
Fuel tank capacity: 550ml

Fuel mix ratio
25:1



Oil tank capacity: 260ml
Fuel mix ratio: 25:1



WD020812462 Gasoline Chain Saw

24"/62cc

Displacement: 62cc
Engine power: 2800W/3.8HP
Guide bar size: 600mm(24")
Standard chain: 0.325"/0.058"
Fuel tank capacity: 550ml

Fuel mix ratio
25:1



Oil tank capacity: 260ml
Fuel mix ratio: 25:1



WD021011031 Gasoline Brushcutter

10"/31cc

Displacement: 31cc
Engine power: 800W/1.1HP
Idle speed: 2800-3200/min
Maximum speed: 6500/min
Fuel tank capacity: 480ml
Grass diameter: 430mm
Cutting diameter: 255mm
Metal blade size: 255x25.4mm
Aluminum alloy rod diameter: 26mm
Tube wall thickness 2.0mm
Drive shaft: 8mm 9T


4-stroke



WD021031052 Gasoline Brushcutter

10"/52cc


Displacement: 52cc
Engine power: 1450W/1.9HP
Idle speed: 2800-3200/min
Maximum speed: 9500/min
Fuel tank capacity: 1200ml
Grass diameter: 430mm
Cutting diameter: 255mm
Metal blade size: 255x25.4mm
Aluminum alloy rod diameter: 28mm
Tube wall thickness 2.0mm
Drive shaft: 8mm 9T
Fuel mix ratio: 25:1



WD020412270 Gasoline High Pressure Washer

7.0HP/220BAR


Max.pressure: 220bar/3200PSI
Max.flow: 10L/min
Max.output: 7.0HP
Revolution: 3400/min
Supply temperature max: 40°C



WD020410150 Gasoline High Pressure Washer

15HP/248BAR

Max.pressure: 248bar/3600PSI
Max.flow: 16.0L/min
Max.output: 15.0HP
Revolution: 3400/min
Supply temperature max: 40°C



WD020315070 Gasoline Water Pump

7.0HP/208cc


Displacement: 208cc
Max.output: 7.0HP
Max.flow: 30m³/h
Max.head: 26m
Max.suction head: 7m
Inlet/Outlet: Ø50xØ50mm (2"x2")
Fuel tank capacity: 3.6L



WD020318070 Gasoline Water Pump

7.0HP/208cc


Displacement: 208cc
Max.output: 7.0HP
Max.flow: 60m³/h
Max.head: 28m
Max.suction head: 7m
Inlet/Outlet: Ø80xØ80mm (3"x3")
Fuel tank capacity: 3.6L



WD021118065 Diesel Water Pump

5.2HP/296cc

Displacement: 296cc
Rated output: 4000W/5.2HP
Max.flow: 55m³/h
Max.head: 30m
Max.suction head: 7m
Inlet/Outlet: Ø80xØ80mm (3"x3")



WD021118065 Diesel Water Pump

5.2HP/296cc

Displacement: 296cc
Rated output: 4000W/5.2HP
Max.flow: 55m³/h
Max.head: 30m
Max.suction head: 7m
Inlet/Outlet: Ø80xØ80mm (3"x3")



With Battery

WD060413300 Diesel Generator

3300W

Rated voltage: 230V~50Hz
Rated A.C.output:
3000W
Max.A.C.output:
3300W
AC current: 20.8A
Rated D.C.output:
12V/8.3A
Displacement:
296cc
Fuel tank capacity: 12.5L



WD060415000 Diesel Generator

5000W

Rated voltage: 230V~50Hz
Rated A.C.output:
4500W
Max.A.C.output:
5000W
AC current: 20.8A
Rated D.C.output:
12V/8.3A
Displacement:
418cc
Fuel tank capacity: 12.5L



WD060425000 Diesel Silent Generator

5000W

Rated voltage: 230V~50Hz
Rated A.C.output:
4500W
Max.A.C.output:
5000W
AC current: 20.8A
Rated D.C.output:
12V/8.3A
Displacement:
418cc
Fuel tank capacity:
16L



WD060417000 Diesel Silent Generator

7000W

Rated voltage: 230V~50Hz
Rated A.C.output:
6500W
Max.A.C.output:
7000W
AC current: 29.5A
Rated D.C.output:
12V/8.3A
Displacement:
498cc
Fuel tank capacity:
16L



WD060417500 Diesel Silent Generator

7500W

Rated voltage: 230V~50Hz
Rated A.C.output:
7000W
Max.A.C.output:
7500W
AC current: 31.8A
Rated D.C.output:
12V/8.3A
Displacement:
531cc
Fuel tank capacity:
16L



WD060410105 Diesel Silent Generator Single-phase

10.5KW

Rated voltage: 220/380V~50Hz
Rated A.C.output:
9500W
Max.A.C.output:
10500W
AC current:
11.6/13.0A
Rated D.C.output:
12V/8.3A
Displacement: 954cc
Fuel tank capacity:
30L



WD060410105 Diesel Silent Generator Three-phase

10.5KW


Rated voltage: 220/380V~50Hz
Rated A.C.output:
9500W
Max.A.C.output:
10500W
AC current:
11.6/13.0A
Rated D.C.output:
12V/8.3A
Displacement: 954cc
Fuel tank capacity:
30L



WD060410220 Diesel Silent Generator Single-phase

22KW

Rated voltage: 220/380V~50Hz
Rated A.C.output:
20000W
Max.A.C.output:
22000W
AC current: 90/30A
Rated D.C.output:
14V/20A
Displacement: 2.19L
Cool water capacity:
2.29L
Fuel tank capacity: 68L



WD060410275 Diesel Silent Generator Three-phase

27.5KW

Rated voltage: 220/380V~60Hz
Rated A.C.output:
25000W
Max.A.C.output:
27500W
AC current: 90/30A
Rated D.C.output:
14V/20A
Displacement: 2.19L
Cool water capacity:
2.29L
Fuel tank capacity: 68L



WD060122016

Inverter MMA DC Welding Machine

160A

Rated voltage:220-240V~50/60Hz
Input capacity:7.2KVA
No load voltage VRD:45V
Open circuit voltage(OCV):72V
Output range:20-160A
Duty cycle:60%@160A
Efficiency (%):80%
Protection class IP21S
Electrode diameter:1.6-3.2mm



WD060122020

Inverter MMA DC Welding Machine

200A

Rated voltage:220-240V~50/60Hz
Input capacity:9.6KVA
No load voltage VRD:45V
Open circuit voltage(OCV):72V
Output range:20-200A
Duty cycle:60%@200A
Efficiency (%):80%
Protection class IP21S
Electrode diameter:1.6-4.0mm



WD060122025

Inverter MMA DC Welding Machine

250A

Rated voltage:220-240V~50/60Hz
Input capacity:12.8KVA
No load voltage VRD:45V
Open circuit voltage(OCV):72V
Output range:20-250A
Duty cycle:60%@250A
Efficiency (%):80%
Protection class IP21S
Electrode diameter:1.6-5.0mm



WD060132016

Inverter MMA DC Welding Machine

120A/160A

Rated voltage:120-240V~50/60Hz
Input capacity:7.2KVA
No load voltage VRD:45V
Open circuit voltage(OCV):72V
Output range 220V:20-160A
Output range 120V:20-120A
Duty cycle:30%@160A
Efficiency (%):80%
Protection class IP21S
Electrode diameter:1.6-4.0mm



Output current 220V :20-160A
Output current 120V: 20-120A



WD060113021

Inverter MMA DC Welding Machine

210A

5PCS PCB

Rated voltage:220-240V~50/60Hz
Input capacity:12.8KVA
No load voltage VRD:45V
Open circuit voltage(OCV):75V
Output range:30-210A
Duty cycle:30%@210A
Efficiency (%):80%
Protection class IP21S
Electrode diameter:1.6-5.0mm



220-240V



WD060123040

Inverter MMA DC Welding Machine

400A


Rated voltage:380V~50/60Hz
Input capacity:24.6KVA
No load voltage VRD:78V
Output range:30-400A
Duty cycle:60%@400A
Efficiency (%):80%
Protection class IP21S
Electrode diameter:1.6-5.0mm



380V




HSS Drill Bit 4341



HSS Grade	Chemical Composition	W	Mo	Cr	V	Co
4341 Material		3.80-4.50	2.80-3.50	3.80-4.40	1.20-1.80	—

Model No.	Diameter (mm)	QTY/CTN	Total Length (mm)	Working Length (mm)
WD71011030061	3	4000	61	33
WD71011035070	3.5	4000	70	39
WD71011040075	4	4000	75	43
WD71011045080	4.5	2000	80	47
WD71011050086	5	2000	86	52
WD71011060093	6	2000	93	57
WD71011070109	7	1000	109	69
WD71011080117	8	500	117	75
WD71011090125	9	500	125	81
WD71011100133	10	500	133	87
WD71011110142	11	300	142	94
WD71011120151	12	300	151	101
WD71011130151	13	300	151	101

HSS Drill Bit M35




HSS Grade	Chemical Composition	W	Mo	Cr	V	Co
M 35 Material		6.00-6.70	4.70-5.20	3.80-4.50	1.70-2.00	4.50-5.50




Model No.	Diameter (mm)	QTY/CTN	Total Length (mm)	Working Length (mm)
WD71011030061	3	4000	61	33
WD71011035070	3.5	4000	70	39
WD71011040075	4	4000	75	43
WD71011045080	4.5	2000	80	47
WD71011050086	5	2000	86	52
WD71011060093	6	1000	93	57
WD71011070109	7	500	109	69
WD71011080117	8	500	117	75
WD71011090125	9	250	125	81
WD71011100133	10	250	133	87
WD71011110142	11	150	142	94
WD71011120151	12	150	151	101
WD71011130151	13	150	151	101

Masonry Drill Bit




Model No.	Diameter (mm)	QTY/CTN	Total Length (mm)	Working Length (mm)
WD71081003060	3	400	60	30
WD71081004075	4	400	75	40
WD71081005085	5	400	85	50
WD71081006150	6	300	150	90
WD71081008150	8	300	150	90
WD71081010150	10	200	150	90
WD71081012150	12	200	150	90

SDS Plus Hammer Drill Bit





Model No.	Diameter (mm)	QTY/CTN	Total Length (mm)	Working Length (mm)
WD71022006160	6	300	160	100
WD71022008160	8	300	160	100
WD71022010160	10	300	160	100
WD71022012160	12	300	160	100
WD71022014160	14	180	160	100
WD71022016160	16	180	160	100
WD71022006260	6	200	260	200
WD71022008260	8	200	260	200
WD71022010260	10	200	260	200
WD71022012260	12	200	260	200
WD71022014260	14	120	260	200
WD71022016260	16	120	260	200
WD71022010310	10	200	310	250
WD71022012310	12	200	310	250
WD71022014310	14	100	310	250

SDS Plus Chisel





Model No.	Diameter (mm)	QTY/CTN	Width (mm)	Length (mm)
WD71052020250	14	60	20	250
WD71052040250	14	60	40	250
WD71052050250	14	60	50	250





Model No.	Diameter (mm)	QTY/CTN	Width (mm)	Length (mm)
WD71051000250	14	60	0	250

Hex Chisel



Model No.	Diameter (mm)	QTY/CTN	Width (mm)	Length (mm)
WD71062025280	17	50	25	280
WD71062050280	17	50	50	280
WD71065040410	30	10	40	410



Model No.	Diameter (mm)	QTY/CTN	Width (mm)	Length (mm)
WD71061000280	17	50	10	280
WD71064000410	30	10	40	410

Magnetic Screwdriver Bit




Total Length




Model No.	Diameter (mm)	QTY/CTN	Length (mm)
WD72010500103	1/4	1000	50



Total Length




Model No.	Diameter (mm)	QTY/CTN	Length (mm)
WD72140653163	1/4	1000	65
WD72140651133	1/4	1000	65




Total Length



Model No.	Diameter (mm)	QTY/CTN	Length (mm)
WD72010500103	1/4	600	100
WD72110651133	1/4	500	150



Total Length



Model No.	Diameter (mm)	QTY/CTN	Length (mm)
WD72010500103	1/4	1200	50
WD72110651133	1/4	1200	65

Model No.	Diameter (mm)	QTY/CTN	Length (mm)
WD72010500103	1/4	1200	50
WD72110651133	1/4	1200	65



Total Length



Model No.	Diameter (mm)	QTY/CTN	Length (mm)
WD72230650406	6	1000	65
WD72230650407	7	1000	65
WD72230650408	8	1000	65
WD72230650410	10	600	65
WD72230650412	12	600	65
WD72230650413	13	600	65
WD72230650417	17	600	65
WD72230650419	19	500	65




Total Length



Model No.	Diameter (mm)	QTY/CTN	Length (mm)
WD72230650406	6	1000	65
WD72230650407	7	1000	65
WD72230650408	8	1000	65
WD72230650410	10	600	65
WD72230650412	12	600	65
WD72230650413	13	600	65
WD72230650417	17	600	65
WD72230650419	19	500	65

Model No.	Diameter (mm)	QTY/CTN	Length (mm)
WD72230650406	6	1000	65
WD72230650407	7	1000	65
WD72230650408	8	1000	65
WD72230650410	10	600	65
WD72230650412	12	600	65
WD72230650413	13	600	65
WD72230650417	17	600	65
WD72230650419	19	500	65



Total Length



Model No.	Diameter (mm)	QTY/CTN	Length (mm)
WD72010500103	1/4	600	100
WD72110651133	1/4	500	150



Total Length

Model No.	Diameter (mm)	QTY/CTN	Length (mm)
WD72010500103	1/4	600	100
WD72110651133	1/4	500	150

Model No.	Diameter (mm)	QTY/CTN	Length (mm)
WD72010500103	1/4	600	100
WD72110651133	1/4	500	150


Diamond Core Bit



Model No.	Diameter (mm)	Length (mm)	QTY/CTN
WD71281026450	26	450	50
WD71281032450	32	450	50
WD71281040450	40	450	36
WD71281053450	53	450	21
WD71281063450	63	450	17
WD71281076450	76	450	10
WD71281083450	83	450	8
WD71281102450	102	450	10
WD71281127450	127	450	8
WD71281132450	132	450	6
WD71281159450	159	450	5
WD71281166450	166	450	4
WD71281180450	180	450	4
WD71281202450	202	450	2
WD71281254450	254	450	1

Model No.	Diameter (mm)	Length (mm)	QTY/CTN
WD71281026450	26	450	50
WD71281032450	32	450	50
WD71281040450	40	450	36
WD71281053450	53	450	21
WD71281063450	63	450	17
WD71281076450	76	450	10
WD71281083450	83	450	8
WD71281102450	102	450	10
WD71281127450	127	450	8
WD71281132450	132	450	6
WD71281159450	159	450	5
WD71281166450	166	450	4
WD71281180450	180	450	4
WD71281202450	202	450	2
WD71281254450	254	450	1

45° Chamfer Bit



Model No.	Shank size	Tool head size	QTY/CTN
WD71260563006	1/4"	1/4"	100
WD71260563007	1/4"	5/16"	100
WD71260563008	1/4"	3/8"	100
WD71260563009	1/4"	1/2"	100
WD7126058001	8	6	100
WD7126058002	8	8	100
WD7126058003	8	10	100
WD7126058004	8	12	100

Mixing Paddle



140mm

Model No.	Length (mm)	QTY/CTN
WD71291014140	140mm	12

Gauge Brad Nail



Model No.	Length (mm)	QTY/CTN
WD71331180010	10	100000
WD71331180015	15	100000
WD71331180020	20	100000
WD71331180025	25	100000
WD71331180030	30	100000
WD71331180032	32	100000
WD71331180035	35	100000
WD71331180040	40	100000
WD71331180045	45	100000
WD71331180050	50	100000

Model No.	Length (mm)	QTY/CTN
WD71331180010	10	100000
WD71331180015	15	100000
WD71331180020	20	100000
WD71331180025	25	100000
WD71331180030	30	100000
WD71331180032	32	100000
WD71331180035	35	100000
WD71331180040	40	100000
WD71331180045	45	100000
WD71331180050	50	100000

Model No.	Length (mm)	QTY/CTN
WD71331180010	10	100000
WD71331180015	15	100000
WD71331180020	20	100000
WD71331180025	25	100000
WD71331180030	30	100000
WD71331180032	32	100000
WD71331180035	35	100000
WD71331180040	40	100000
WD71331180045	45	100000
WD71331180050	50	100000

Model No.	Length (mm)	QTY/CTN
WD71331180010	10	100000
WD71331180015	15	100000
WD71331180020	20	100000
WD71331180025	25	100000
WD71331180030	30	100000
WD71331180032	32	100000
WD71331180035	35	100000
WD71331180040	40	100000
WD71331180045	45	100000
WD71331180050	50	100000

Model No.	Length (mm)	QTY/CTN
WD71331180010	10	100000
WD71331180015	15	100000
WD71331180020	20	100000
WD71331180025	25	100000
WD71331180030	30	100000
WD71331180032	32	100000
WD71331180035	35	100000
WD71331180040	40	100000
WD71331180045	45	100000
WD71331180050	50	100000

Model No.	Length (mm)	QTY/CTN
WD71331180010	10	100000
WD71331180015	15	100000
WD71331180020	20	100000
WD71331180025	25	100000
WD71331180030	30	100000
WD71331180032	32	100000
WD71331180035	35	100000
WD71331180040	40	100000
WD71331180045	45	100000
WD71331180050	50	100000

Model No.	Length (mm)	QTY/CTN
WD71331180010	10	100000
WD71331180015	15	100000
WD71331180020	20	100000
WD71331180025	25	100000
WD71331180030	30	100000
WD71331180032	32	100000
WD71331180035	35	100000
WD71331180040	40	100000
WD71331180045	45	100000
WD71331180050	50	100000

Gauge Crown Nail



Model No.	Length (mm)	QTY/CTN
WD71331180525	25	80000
WD71331180532	32	80000
WD71331180538	38	80000
WD71331180540	40	80000

Model No.	Length (mm)	QTY/CTN
WD71331180525	25	80000
WD71331180532	32	80000
WD71331180538	38	80000
WD71331180540	40	80000

Model No.	Length (mm)	QTY/CTN
WD71331180525	25	80000
WD71331180532	32	80000
WD71331180538	38	80000
WD71331180540	40	80000

45° Chamfer Bit



Model No.	Shank size	Tool head size	QTY/CTN
WD71260563006	1/4"	1/4"	100
WD71260563007	1/4"	5/16"	100
WD71260563008	1/4"	3/8"	100
WD71260563009	1/4"	1/2"	100
WD7126058001	8	6	100
WD7126058002	8	8	100
WD7126058003	8	10	100
WD7126058004	8	12	100

Model No.	Shank size	Tool head size	QTY/CTN
WD71260563006	1/4"	1/4"	100
WD71260563007	1/4"	5/16"	100
WD71260563008	1/4"	3/8"	100
WD71260563009	1/4"	1/2"	100
WD7126058001	8	6	100
WD7126058002	8	8	100
WD7126058003	8	10	100
WD7126058004	8	12	100

Model No.	Shank size	Tool head size	QTY/CTN
WD71260563006	1/4"	1/4"	100
WD71260563007	1/4"	5/16"	100
WD71260563008	1/4"	3/8"	100
WD71260563009	1/4"	1/2"	100
WD7126058001	8	6	100
WD7126058002	8	8	100
WD7126058003	8	10	100
WD7126058004	8	12	100

Model No.	Shank size	Tool head size	QTY/CTN
WD71260563006	1/4"	1/4"	100
WD71260563007	1/4"	5/16"	100
WD71260563008	1/4"	3/8"	100
WD71260563009	1/4"	1/2"	100
WD7126058001	8	6	100
WD7126058002	8	8	100
WD7126058003	8	10	10

Cove Box Bit



Model No.	Shank size	Tool head size	QTY/CTN
WD71260663006	1/4"	1/4"	100
WD71260663007	1/4"	5/16"	100
WD71260663008	1/4"	3/8"	100
WD71260663009	1/4"	1/2"	100
WD71260608001	8	6	100
WD71260608002	8	8	100
WD71260608003	8	10	100
WD71260608004	8	12	100

Rounding Over Bit



Model No.	Shank size	Tool head size	QTY/CTN
WD71260763006	1/4"	1/4"	100
WD71260763007	1/4"	5/16"	100
WD71260763008	1/4"	3/8"	100
WD71260763009	1/4"	1/2"	100
WD71260708001	8	6	100
WD71260708002	8	8	100
WD71260708003	8	10	100
WD71260708004	8	12	100

90°"V" Grooving Bit



Model No.	Shank size	Tool head size	QTY/CTN
WD71260363006	1/4"	1/4"	100
WD71260363007	1/4"	5/16"	100
WD71260363008	1/4"	3/8"	100
WD71260363009	1/4"	1/2"	100
WD71260308001	8	6	100
WD71260308002	8	8	100
WD71260308003	8	10	100
WD71260308004	8	12	100

Dovetail Bit



Model No.	Shank size	Tool head size	QTY/CTN
WD71260463006	1/4"	1/4"	100
WD71260463007	1/4"	5/16"	100
WD71260463008	1/4"	3/8"	100
WD71260463009	1/4"	1/2"	100
WD71260408001	8	6	100
WD71260408002	8	8	100
WD71260408003	8	10	100
WD71260408004	8	12	100

Router Bits Set



Model No.	QTY/CTN
WD71268108002	10

	Cove BOX Bit R6.3		Corner Round Bit R6.3
	Cove Bit R6.3		Straight Bit 6
	Dovetail Bit 12.7		Straight Bit 12
	45° Chamfer Bit 32		Corner Round Bit R9.5
	Flush Trim Bit 12.7		90°"V" Grooving Bit 12.7
	Straight Bit 16		Roman Ogee Bit R4

Router Bits Set



Model No.	QTY/CTN
WD71268163003	10

	Straight Bit 1/8"		Straight Bit 5/8"
	90°"V" Grooving Bit 1/2"		Dovetail Bit 1/2"
	Cove Box Bit R1/8"		Flush Trim Bit 1/2"
	Panel Pilot Bit 1/4"		45° Chamfer Bit 1-1/4"
	Mortising Bit 1/2"		Cove Bit R1/4"
	Straight Bit 1/4"		Roman Ogee Bit R5/32"

Jig Saw Blade



Model No.	Reference Model	QTY/CTN	Width (mm)	Length (mm)
WD71241004001	T144D	400	8	100
WD71241004002	T244D	400	6	76

Glass Drill



Model No.	Diameter (mm)
WD71118110001	4/5/6/8/10



Model No.	Diameter (mm)
WD71118120001	4/5/6/8/10

TCT Saw Blade



Model No.	Diameter (mm)	QTY/CTN	Arbor	Teeth	Expert For
WD71231185024	185	50	20	24T	Wood
WD71231185040	185	50	20	40T	Wood
WD71231230040	230	25	25.4	40T	Wood
WD71231230060	230	25	25.4	60T	Wood
WD71231254040	254	20	25.4	40T	Wood
WD71231254060	254	20	25.4	60T	Wood
WD71231254080	254	20	25.4	80T	Wood
WD71231254100	254	20	25.4	100T	Aluminum
WD71231254120	254	20	25.4	120T	Aluminum
WD71231305040	305	10	25.4	40T	Wood
WD71231305060	305	10	25.4	60T	Wood
WD71231305100	305	10	25.4	100T	Aluminum
WD71231305120	305	10	25.4	120T	Aluminum

Flap Disc



Model No.	Diameter (mm)	QTY/CTN	Paper	Particle Size
WD71321160100	100	200	72	P40 P60 P80 P100 P120
WD71321222115	115	200	72	P40 P60 P80 P100 P120
WD71321222125	125	200	72	P40 P60 P80 P100 P120

Abrasive Disc



Cutting Metal Disc

Model No.	Specification (mm)	QTY/CTN	Max. speed (/min)
WD71213115012	115X1.2X22.2	600	13300
WD71213125012	125X1.2X22.2	480	12300
WD71212115030	115X3X22.2	200	13300
WD71212125030	125X3X22.2	200	12300



Model No.	Specification (mm)	QTY/CTN	Max. speed (/min)
WD71213180016	180X1.6X22.2	200	8500
WD71213230018	230X1.8X22.2	100	6600
WD71212180030	180X3X22.2	100	8500
WD71212230030	230X3X22.2	50	6600
WD71213350530	355X3X22.2	25	4400



Grinding Metal Disc

Model No.	Specification (mm)	QTY/CTN	Max. speed (/min)
WD71211115060	115X6X22.2	100	13300
WD71211125060	125X6X22.2	100	12300
WD71211180060	180X6X22.2	25	8500
WD71211230060	230X6X22.2	25	6600

Double Row Diamond Cup Wheel



Double Row

Model No.	Diameter (mm)	QTY/CTN	Blades (pcs)	ARBOR
WD71272115222	115	50	18	22.2
WD71272125222	125	50	20	22.2
WD71272180222	180	20	24	22.2

Strip Disc



Model No.	Diameter (mm)	Size (mm)
WD7221160100	100	16
WD72211222115	115	22.23
WD72211222125	125	22.23
WD72211222180	180	22.23

Diamond Dry Cutting Disc



Model No.	Max.speed (/min)	QTY/CTN	Size (mm)
WD71221110200	13300	100	110X20
WD71221115222	12300	100	115X22
WD71221125222	12200	100	125X22
WD71221180222	8500	50	180X22
WD71221230222	6600	25	230X22

Diamond Wet Cutting Disc




Model No.	Max.speed (/min)	QTY/CTN	Size (mm)
WD71222115222	13300	100	115X22.2
WD71222125222	12300	100	125X22.2
WD71222180222	8500	50	180X22.2
WD71222230222	6600	25	230X22.2

Diamond Turbo Cutting Disc



Model No.	Max.speed (/min)	QTY/CTN	Size (mm)
WD71223115222	13300	100	115X22.2
WD71223125222	12300	100	125X22.2
WD71223180222	8500	50	180X22.2
WD71223230222	6600	25	230X22.2

Round Sanding Disc



Zirconia sanding disc


Model No.	Diameter (mm)	Particle Size
WD71341125000	125	P40*2/P60*2/P80*3/P120*3
WD71341150000	150	P40*2/P60*2/P80*4/P120*2
WD71341150000	150	P60*2/P120*1/P180*2/P240*2/P320*2/P400*1
WD71341150000	150	P600*2/P1000*2/P1200*2/P1500*2/P2000*2
WD71341225000	225	P180*4/P240*4/P320*2



Aluminum sanding disc


Model No.	Diameter (mm)	Particle Size
WD71341125000	125	P40*2/P60*2/P80*3/P120*3
WD71341150000	150	P40*2/P60*2/P80*4/P120*2
WD71341150000	150	P60*2/P120*1/P180*2/P240*2/P320*2/P400*1
WD71341150000	150	P600*2/P1000*2/P1200*2/P1500*2/P2000*2
WD71341225000	225	P180*4/P240*4/P320*2

Sanding Sheet



Zirconia sanding disc


Model No.	Diameter (mm)	Particle Size
WD71341114145	114*145	P80*6/P120*4



Aluminum sanding disc


Model No.	Diameter (mm)	Particle Size
WD71341114145	114*145	P80*6/P120*4

Square Sanding Disc



Zirconia sanding disc

Model No.	Diameter (mm)	Particle Size
WD71341103110	103*110	P60*1/P80*1/P100*1/P120*1/P150*1/P180*1/P220*1/P240*1
WD71341103110	103*110	P280*1/P320*1/P360*1/P400*1/P480*1/P500*1/P520*1/P550*1/P600*1
WD71341230280	230*280	P60*1/P80*1/P100*1/P120*1/P150*1/P180*1/P220*1/P240*1
WD71341230280	230*280	P280*1/P320*1/P360*1/P400*1/P480*1/P500*1/P520*1/P550*1/P600*1



Aluminum sanding disc

Model No.	Diameter (mm)	Particle Size
WD71341103110	103*110	P60*1/P80*1/P100*1/P120*1/P150*1/P180*1/P220*1/P240*1
WD71341103110	103*110	P280*1/P320*1/P360*1/P400*1/P480*1/P500*1/P520*1/P550*1/P600*1
WD71341230280	230*280	P60*1/P80*1/P100*1/P120*1/P150*1/P180*1/P220*1/P240*1
WD71341230280	230*280	P280*1/P320*1/P360*1/P400*1/P480*1/P500*1/P520*1/P550*1/P600*1

Air hose



Model No.	Diameter (mm)	Length (m)	QTY/CTN
WD75011080050	5/8mm	5	50
WD75011080100	5/8mm	10	25
WD75011080150	5/8mm	15	25

Safety Helmet



PE shell with vents

Material:PE
Lining: Four-point webbing lining
Head circumference: 53-64cm
With chin strap,sponge sweat belt
"V"-type top reinforcement,anti-puncture, anti-smashing.
Adjust head size by ratchet knob.

Weight: 390g

Model No.	Color	QTY/CTN
WD816615364	Blue	20
WD816615364	Red	20
WD816615364	White	20
WD816615364	Yellow	20

Dust Mask



Easy breath through fully adjustable fit

Model No.	QTY/CTN
WD818110000	400

Earmuff



SNR:25dB

New ABS for shell and head hoop high quality sponges in the shell.
High fitting, excellent noise reduction.
It can be used for sawer, garden equipment,compressed air equipment construction site, etc.

Model No.	QTY/CTN
WD817910000	50

Welding mask



Material:100% new PP
With 1 pc 108*50*3mm welding glass
Protect face and head from hurt by spark
Applied for welding, cutting, gas cutting, etc.

Model No.	QTY/CTN
WD817720000	24

Welding goggles




Flexible PVC body.
Dark shade:6
Elastic belt.
Flip design with open-close locking positioning.
Inner lenses are clear, outer lenses adopt colored inorganic glass.

Model No.	QTY/CTN
WD817710000	36

Safety Goggles



Safety Goggles with retractable temples



PC



Model No.	QTY/CTN
WD816110000	60



UV
400nm

Ultraviolet protection Safety Goggles




PC



Model No.	Dark Shade	QTY/CTN
WD816140000	8	60



PC lenses, frames, temples Coverable myopia glasses



PC



Model No.	QTY/CTN
WD816120000	60



PVC/PC lens for choice, PVC frame, elastic belt



PC



Model No.	QTY/CTN
WD816130000	120

Polycotton Glove With Palm PVC Dots



Polyester-cotton glove core, PVC Dots Firm grip, PVC dots help to prevent slipping when grasping. Premium cotton polyester yarns, for perspiration free work No pungent smell, oil resistant, wear and tear resistance, not easy to be pierced and cut, for industrial use.

L: 46g per pair XL: 48g per pair



Model No.	Length (mm)	QTY/CTN	Size
WD810411090	9"	120	L
WD810411105	10.5"	120	XL

Latex Crinkle Coated Glove



Palm crinkle coated High latex content No pungent smell, oil resistant, wear and tear resistance, not easy to be pierced and cut, for industrial use.

L: 113g per pair XL: 115g per pair



Model No.	Length (mm)	QTY/CTN	Size
WD811011090	9"	120	L
WD811011105	10.5"	120	XL



2142X

Yarn glove core palm crinkle coated No pungent smell, oil resistant, wear and tear resistance, not easy to be pierced and cut, for industrial use.

108g per pair



Model No.	Length (mm)	QTY/CTN	Size
WD810211100	10"	120	XL



2131X

Polyester glove core palm crinkle coated No pungent smell, oil resistant, wear and tear resistance, not easy to be pierced and cut, for industrial use.

L: 53g per pair XL: 55g per pair



Model No.	Length (mm)	QTY/CTN	Size
WD810911090	9"	120	L
WD810911105	10.5"	120	XL

Nylon Glove With Palm PVC Dots



Nylon and Polyester-cotton glove core, PVC Dots

Firm grip, PVC dots help to prevent slipping when grasping. Premium cotton polyester yarns, for perspiration free work No pungent smell, oil resistant, wear and tear resistance, not easy to be pierced and cut, for industrial use.

L: 46g per pair XL: 48g per pair



Model No.	Length (mm)	QTY/CTN	Size
WD810311090	9"	120	L
WD810311105	10.5"	120	XL

Full Latex Wave Gloves



13 gauge polyester Full latex wave gloves

70g Latex Coated, Gardening Gloves, Work Gloves, Double dipped, Textured Grip Gloves for Men/Women.

Heavy-Duty Durability: These Gardening gloves for Women and work gloves for men are designed with Long-Lasting Durability, ensuring they can withstand rigorous activities like construction and moving.

L: 70g per pair XL: 73g per pair



Model No.	Length (mm)	QTY/CTN	Size
WD810811090	9"	120	L
WD810811105	10"	120	XL

Nitrile Coated Gloves



NBR

Polyester glove core

No pungent smell, oil resistant, wear and tear resistance, not easy to be pierced and cut, for industrial use.

L: 42g per pair XL: 45g per pair



Model No.	Length (mm)	QTY/CTN	Size
WD810111090	9"	120	L
WD810111105	10.5"	120	XL

Cowhide Working Gloves



Leather: Cowhide leather, AB grade. Style: Full palm, yellow cotton twill back and rubberized cuff, polyester half palm lining, yellow cloth double binding.

10.5": 240g per pair



Model No.	Size	QTY/CTN
WD810711105	10.5"	72

Welding Leather Gloves



Cowhide material Anti-mildew treatment of leather
 Leather thickness: 1.2~1.3 mm
 Full reinforced palm with lining. Gauntlet cuff, seamless index finger. Used for welding, heat resistant, heat protective, general maintenance. Abrasion & cut resistant, anti impact, pinching protection. Strong puncture resistant.

14": 350g per pair 16": 427g per pair



Model No.	Size	QTY/CTN
WD810711140	14"	60
WD810711160	16"	60

Reflection Vest



Fluorescent Fabric



Model No.	Color	QTY/CTN	Weight (g)	Material	Size
WD816825668	Green	50	123	Polyester tricot	L
WD816825868	Green	50	128	Polyester tricot	XL
WD816826070	Green	50	133	Polyester tricot	XXL
WD816826270	Green	50	138	Polyester tricot	XXXL



High Reflective Tape

Fluorescent Fabric



Model No.	Color	QTY/CTN	Weight (g)	Material	Size
WD816815668	Green	50	182	Polyester tricot	L
WD816815868	Green	50	186	Polyester tricot	XL
WD816816070	Green	50	190	Polyester tricot	XXL
WD816816270	Green	50	194	Polyester tricot	XXXL

Lanyard



EN 354

Length: 1.5m
 Positioning lanyard is made of Ø10.5mm Kernmantle rope

Model No.	QTY/CTN	Length (cm)
WD818411015	20	150

Safety Harness



EN 361

Material: Polyester
 Webbing Width: 45mm
 1pc anti-falling dorsal D-ring
 3 adjustment point
 Comply with CE requirements
 Adjustable thigh and chest strap
 Chest strap position can be adjusted vertically

Model No.	QTY/CTN	Width (mm)
WD817014503	10	45

Webbing Sling



Safety factor 7:1
 Material: 100% high tensile polyester (PES)

Model No.	QTY/CTN	Color	Length (m)	Load-bearing (t)
WD817210205	18	Green	5	2
WD817210403	10	Grey	3	4
WD817210404	8	Grey	4	4
WD817210405	8	Grey	5	4
WD817210406	6	Grey	6	4
WD817210504	8	Red	4	5
WD817210506	6	Red	6	5
WD817210606	4	Brown	6	6
WD817210608	3	Brown	8	6

Ratchet tie down



CE 100% PES

With ratchet and double J hooks
 Material: 100% Polyester

Model No.	QTY/CTN	Length (m)	Load-bearing (t)
WD817510310	10	10	3
WD817510510	10	10	5

Sucker



Maximum Pull: 25kg
 Cup Diameter: 115mm
 Material: Plastic and aluminum
 Function: Mainly apply to converging the object with smooth surface, such as glass, electrical appliance, etc. Fit for portage, shipbuilding and so on.

Model No.	QTY/CTN	Max. Pull (kg)	Cup Diameter (mm)
WD818610125	36	25	115



Max. Pull: 50kg
 Cup Diameter: 115mm
 Material: Plastic and aluminum
 Function: Mainly apply to converging the object with smooth surface, such as glass, electrical appliance, etc. Fit for portage, shipbuilding and so on.
 Double-end

Model No.	QTY/CTN	Max. Pull (kg)	Cup Diameter (mm)
WD818610250	18	50	115

Safety Footwear



S3 safety footwear,

match EN ISO 20345:2022
 Leather & nylon mesh upper. Steel toe cap with 200J impact resistance.
 Elastic thick sole, can absorb over 20J, absorb shocks and wear longer time.
 Stab proof midsole with over 1100N puncture resistance. Double density PU thick sole with anti-static protection between 0.1MΩ to 1000MΩ, SR anti-slip.



Model No.	Size	QTY/CTN
WD815211038	38	10
WD815211039	39	10
WD815211040	40	10
WD815211041	41	10
WD815211042	42	10
WD815211043	43	10
WD815211044	44	10
WD815211045	45	10
WD815211046	46	10
WD815211047	47	10
WD815211048	48	10



Model No.	Size	QTY/CTN
WD815111038	38	10
WD815111039	39	10
WD815111040	40	10
WD815111041	41	10
WD815111042	42	10
WD815111043	43	10
WD815111044	44	10
WD815111045	45	10
WD815111046	46	10
WD815111047	47	10
WD815111048	48	10

Security Boots



100% PVC

Material: 100% Virgin PVC
 Height: 40cm
 Steel top cap and steel midsole
 Anti-slip sole, shock-absorption heel
 High level oil, acid alkali resistance, 100% waterproof
 Packed by poly bag

Model No.	Size	QTY/CTN
WD815711039	39	5
WD815711040	40	5
WD815711041	41	5
WD815711042	42	5
WD815711043	43	5
WD815711044	44	5
WD815711045	45	5
WD815711046	46	5

Rain Boots



100% PVC

Material: 100% Virgin PVC
 Height: 40cm
 Anti-slip sole, shock-absorption heel
 High level oil, acid alkali resistance, 100% waterproof
 Packed by poly bag

Model No.	Size	QTY/CTN
WD815611038	38	5
WD815611039	39	5
WD815611040	40	5
WD815611041	41	5
WD815611042	42	5
WD815611043	43	5
WD815611044	44	5
WD815611045	45	5
WD815611046	46	5
WD815611047	47	5

GIFTS

Hat



100pcs
GW: 15.4kg
CBM: 0.88m³

Color QTY/CTN

Green with black	25
Beige	25
Red	25
Black	12
Army green	13
Total	100

Polo Shirt



50pcs
GW: 15.8kg
CBM: 0.88m³

Size QTY/CTN

170/M	10
175/L	21
180/XL	13
185/XXL	5
190/XXXL	1
Total	50

Culture Shirt



100pcs
GW: 16.1kg
CBM: 0.87m³

9 patterns



Size QTY/CTN

175/M	40
180/L	40
185/XL	20
Total	100

Ballpoint Pen



1000pcs
GW: 9.8kg
CBM: 0.53m³

Types Color

Ball-point pen	Blue
Gel ink pen	Black

Leather Notebook



200pcs
GW: 15.8kg
CBM: 0.88m³

Umbrella



20pcs
GW: 15.8kg
CBM: 0.88m³

Handbag



200pcs
GW: 15.8kg
CBM: 0.88m³

Exclusive Luggage Box



4pcs
GW: 12.8kg
CBM: 0.13m³

Feather Banner



6set
GW: 12.8kg
CBM: 0.88m³

Tool Display Stand



2set
GW: 60.8kg
CBM: 0.88m³



ALWAYS DO THE BEST



*For further inquiry, please contact



0086-512-62888913



info@widopt.com



SUZHOU WIDO MACHINERY CO., LTD
Add: No.3 Weihua Road, Suzhou

Yiwu Office Add: Yiwu international Trade City F2-13775

Yiwu Office Tel: 0579-85189017/15381732237

www.widopt.com

